

Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 1 of 38

Test Report For:

(GUANGDONG BETA LABORATORY FURNITURE COMPANY LTD)

SEFA 8M – 2016 LABORATORY GRADE METAL CASEWORK

Signed for and on behalf of SGS-CSTC Co., Ltd. Anji Branch

David Fan

Approved Signatory

This report is for the exclusive use of the Client and only the Client is authorized to permit copying or distribution of this report and then only in its entirety.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sts.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to ferms and Conditions for Electronic Documents at http://www.sts.com/en/Terms-and-Conditions ferms-en-Document.aspx subject to ferms and Conditions for Electronic Documents at http://www.sts.com/en/Terms-and-Conditions ferms-en-Document.aspx advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exponerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery classification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this text report refer only to the sample(s) tested and such sample(s) are retained for 3dys only.



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 2 of 38

Client Contact Information

GUANGDONG BETA LABORATORY FURNITURE COMPANY LTD

EAST, GANGBENG STATION, XIJIU VILLAGE, JINBEN DEVELOPMENT AREA, XINAN TOWN, SANSHUI DISTRICT, FOSHAN CITY, GUANGDONG PROVINCE, PRC.

Phone: 0086 757 8778 1151/8778 1161 Email: angie@chinalabfurniture.com

DATE RECEIVED: OCT 11, 2016 **SAMPLE RE-SUBMITTED DATE:** DEC 12, 2016

DATES TESTED: OCT 11, 2016 to DEC 30, 2016

DESCRIPTION OF SAMPLES:

SEFA 8M Required Test Units

Market Name of Product: BASE CABINET

Model Number	Description of Sample	Condition of Sample
BETALAB-FM-MS-001	Base Cabinet	New





Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 3 of 38

WORK REQUESTED/APPLICABLE DOCUMENTS:

SEFA 8M-2016 Laboratory grade metal casework

Nos. of Specimen : 1pc.

Test Result : Pass. Details shown as following table

Clause	Test Items	Re	sult	Note
4.0	Base cabinets	-		
4.1	Description of test cabinet	-		
4.2	Cabinet load test	Pa	ass	
4.3	Cabinet concentrated load test	Pa	ass	
4.4	Cabinet torsion	Pa	ass	
5.0	Doors	-		
5.1	Door hinge test	Pa	ass	
5.2	Door impact test	Pa	ass	
5.3	Door cycle test	Pa	ass	
6.0	Drawers	-		
6.1	Drawer static test	Pa	ass	
6.2	Drawer and door pull test	Pa	ass	
6.3	Drawer impact test	Pa	ass	
6.4	Drawer internal rolling impact test	Pa	ass	
6.5	Drawer cycle test	Pa	ass	
7.0	Shelving	-		
7.1	Description of test unit	-		
7.2	Shelf load test	Pa	ass	
8.0	Cabinet surface finish test	-		
8.1	Chemical spot test	Pa	ass	
8.2	Hot water test	Pa	ass	
8.3	Impact test	Pa	ass	
8.4	Paint adhesion test	Pa	ass	
8.5	Paint hardness test	Pa	ass	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and cleectoronic format document subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Ferms-en-Document-aspx. Attention is devant to the limitation of liability, indemnification and jurisdiction issues defined therein. Noider of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits clients and structions, if any. The Company's sole responsibility is to its Client and this document one text except a parties to clients and structions, if any. The Company is cold responsibility is to the Client and this document one text except and such as a supervised of the Company. Any unauthorized alteration, forger or falsification of the content, appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention:To check the authenticity of testing / inspection report & certificate, please contact us at telephone;68-755) 839



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 4 of 38

9.0	Wall, counter mounted, and tall units		
9.1	Description of test cabinet	N/A	# 1
9.2	Wall cabinet load test	N/A	# 1
10	Tables		
10.1	Description of test unit	N/A	# 1
10.2	Table static load	N/A	# 1
10.3	Table racking	N/A	# 1
Notes	: # 1- N/A means not applicable to this product design.		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions, aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Cond



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 5 of 38

4.1 DESCRIPTION OF TEST CABINET:

Date Tested: Oct 12, 2016 Condition of Test Sample: New

Overall Size of the test sample: 1218mm (W)×550mm (D)×895mm (H)

Description of Samples:

Model Number	Description of Sample
BETALAB-FM-MS-001	Base Cabinet

Part Description:

Base unit has one drawer, two doors and one adjustable shelf. The drawer is above the cupboard, full width and approximately one-fourth the height of the cabinet's face opening. The inside depth of the drawer is 18.5"(470mm). Cupboard provides unobstructed entry into the cabinet interior with the doors open. The cabinet back is the removable type.

Note to Tester: For the tests to be valid, the required test units must be used.

Photo 1 of Test Unit



Photo 2 of Test Unit





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed verleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at <a href="http://www.sgs.com/en/Terms-and-Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions ferms-e-Document.aspx.com/en/Terms-and-Conditions ferms-e-Document.aspx.advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of clients instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a ransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or afficiation of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the setules shown in this test report refer only to the sample(s) are retained for 30 decreased only.



Test Report

No.: AJHL1610011022FT Date: DEC 30, 2016

Photo of hinge



Photo of leveling bolt mounted in cabinet



Photo of Drawer Pull

Page: 6 of 38



Photo of Door Pull



Photo of Shelf Support







Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.app; and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Con



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 7 of 38

4.2 CABINET LOAD TEST:

Date Tested: Oct 12, 2016 Condition of Test Sample: New

Description of Samples:

Model Number	Description of Sample
BETALAB-FM-MS-001	Base Cabinet

4.2.2 Test Procedure:

Test Method: Verify that the cabinet is level and Isupported only

by the levelers. Load the cabinet top by using 2000 pounds (907.2 Kg) of solid steel bars (per Section 3.1) stacked five high and evenly spaced. After ten minutes,

unload the cabinet.

Number of Samples Tested: One (1)

4.2.3 Acceptance Level:

The cabinet will have no signs of permanent failure. After the load is removed, inspect the levelers. Any deformation shall not interfere with the function of the leveling system.

Results:

The submitted sample meets the acceptance criteria for the test described above. Refer to the following photograph.







Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx, and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Condi



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 8 of 38

4.3 CABINET CONCENTRATED LOAD TEST:

Date Tested: Oct 12, 2016 Condition of Test Sample: New

Model Number	Description of Sample
BETALAB-FM-MS-001	Base Cabinet

4.3.2 Test Procedure:

Test Method: Using solid weights or 10 pound (4.535 Kg) sand bags

(per Section 3.1), apply a total of 200 pounds (90.718 Kg) to the top of the cabinet along the cabinet centerline.

Operate doors and drawers.

Number of Samples Tested: One (1)

4.3.3 Acceptance Level:

Door and drawer operation shall be normal under condition of test load. There shall be no signs of permanent deformation to front rail, cabinet joinery, doors, or drawers.

Results:

The submitted sample meets the acceptance criteria for the test described above. Refer to the following photograph.



Concentrated Load Test



Inless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions, sapx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions-terms-e-Document-sapx. takenton is larawar to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of ilensifications, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a oxcept in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or papearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law lines otherwise stated the esuits shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Intention:To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 9 of 38

4.4 CABINET TORSION:

Date Tested: Oct 12, 2016 to Oct 13, 2016

Condition of Test Samples: New

Model Number	Description of Sample
BETALAB-FM-MS-001	Base Cabinet

4.4.2 Test Procedure:

Test Method:

The cabinet shall be tested in its normal upright position, raised not less than four inches off the floor and supported on rear and one front corner. The area of support under the cabinet shall be located not more than 6" (152.4mm) in from each supported corner. Secure the cabinet diagonally form the supported corner with seven solid steel bars per Section 3.1 (350lbs (158.757Kg) of weight), on the top of the cabinet to prevent overturning. Apply four solid steel bars (200lbs (90.718Kg) of weight) to the unsupported corner for a period of 24 h. Remove weight and place the cabinet on the floor in its normal upright position. Observe the cabinet joinery. Level the cabinet across the diagonal corners.

Number of Samples Tested: One (1)

4.4.3 Acceptance Level:

When returned to normal position, the operation of the cabinet shall be normal, and there will be no signs of permanent damage. The difference between the two measurements taken from measuring the diagonal corners shall be no more than 1/8" (3.175mm).

Results:

The submitted sample meets the acceptance criteria for the test described above. Refer to the following page for photograph.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Ferms and Conditions for Electronic Documents at http://www.sqs.com/en/Terms-and-Conditions for Electronic Documents at http://www.sqs.com/en/Terms-and-Conditions ferms-e-Document.aspx as the state of the state of



Test Report

No.: AJHL1610011022FT

Date: DEC 30, 2016 Page: 10 of 38

Cabinet Torsion Test





Unless otherwise agreed in writing this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appy and, for electronic format document subject to Terms and Conditions for Electronic documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.app subject to Terms and Conditions for the Company of the Company's findings at the time of its intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forger or falsification of the content appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 11 of 38

5.1 DOOR HINGE TEST:

Date Tested: Oct 13, 2016 Condition of Test Sample: New

Model Number	Description of Sample
BETALAB-FM-MS-001	Base Cabinet

5.1.2. Test Procedure:

Test Method: Remove the shelf for this test. With unit and top set

> as described in Section 4.1, add sufficient weight to the top in order to prevent overturning. With cabinet door opened 90-degrees, hang a sling made up of two 100 pound (45.359Kg) weights (shot bags or solid weights) over top of the door at a point 12" (304.8mm) out from the hinge centerline. Slowly move door through twofull cycles of the hinge at 160 degree arc. Remove weight and swing door through its full

intended range of motion and close door.

Number of Samples Tested: One (1)

5.1.3 Acceptance Level:

The open door shall withstand a load of 200 pounds (90.70 Kg) when applied at a point 12" (304.8mm) from the hinge centerline without permanent damage. Operation of the door, after test shall show no significant permanent damage that will cause binding of the door or hinges or that will adversely affect operation of the catch.

Results:

The submitted sample meets the acceptance criteria of the test. The door operated normally through its entire range of motion, and the door catch still operated normally. Refer to the following page for photograph.





Test Report

No.: AJHL1610011022FT

Date: DEC 30, 2016 Page: 12 of 38

Door Hinge Test





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Ferms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions-be-Document.aspx subject to Ferms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions-be-Document.aspx advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document ose not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery classification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 13 of 38

5.2 DOOR IMPACT TEST:

Date Tested: Oct 13, 2016 Condition of Test Sample: New

Model Number	Description of Sample
BETALAB-FM-MS-001	Base Cabinet

5.2.2. Test Procedure:

Test Method: With unit and top set as described in Section 4.1, add

sufficient weight to the top in order to prevent

overturning. A 20lb (9.07Kg) sand bag (Section 3.1) shall be suspended and dropped to provide an impact of 240inch-pounds (27.1N-m) at the center of the closed

door.

Number of Samples Tested: One (1)

5.2.3 Acceptance Level:

After the test the door and catch shall operate normally and show no signs of permanent damage. A dent or depression is an indication of permanent damage. This test is not intended to evaluate the cabinet finish.

Results:

The submitted sample meets the acceptance criteria of the test. The door operated normally through its entire range of motion, and the door catch still operated normally. Refer to the following photograph.



Door Impact Test





Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 14 of 38

5.3 DOOR CYCLE TEST:

Dates Tested: Oct 14, 2016 to Oct 24, 2016

Condition of Test Sample: New

Model Number	Description of Sample
BETALAB-FM-MS-001	Base Cabinet

5.3.2. Test Procedure:

Test Method: This test shall be in conformance to the ANSI test

> procedure A156.9, Grade 1, requirements for cycle testing of doors. A cycling mechanism shall swing door 90-degrees. Door shall operate for 100,000 cycles with a speed not greater than 15 cycles per minute. (Notes takes approximately 112 hours)

Number of Samples Tested: One (1)

5.3.3 Acceptance Level:

Door shall operate for the full cycle period without deterioration that will significantly affect the function of the door. The door shall operate freely without binding.

Results:

There was no functional or structural damage to the unit. The doors operated freely with out binding. The sample meets the acceptance criteria. Refer to the following photograph.









Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 15 of 38

6.1 DRAWER STATIC TEST:

Date Tested: Oct 25, 2016 Condition of Test Sample: New

Model Number	Description of Sample
BETALAB-FM-MS-001	Base Cabinet

6.1.2. Test Procedure:

Test Method: With unit and top set as described in Section 4.1,

add sufficient weight to the top in order to prevent overturning. Open the drawer to 13" (330.2mm) of travel and hang 150 pounds (68.03 Kg) from the drawer head at the centerline of the drawer for five minutes. Remove the weight and operate the drawer

through the full cycle.

Number of Samples Tested: One (1)

6.1.3. Acceptance Level:

There shall be no interference with the normal operation of the drawer and the drawer head should remain tightly fastened to the drawer.

Results:

The submitted sample met the acceptance criteria of the test. Refer to the following photograph.



Drawer Static Load Test



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Cond



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 16 of 38

6.2 DRAWER AND DOOR PULL TEST:

Date Tested: Oct 25, 2016 Condition of Test Sample: New

Model Number	Description of Sample
BETALAB-FM-MS-001	Base Cabinet

6.2.2. Test Procedure:

Test Method: Pulls are to be installed in accordance with

manufacturer's practice using specified attaching hardware and method. Block door and drawer closed. Using a force gauge attached with a 1" (25.4mm) wide bracket, apply a force of 50 pounds

(22.68 Kg), for 15s, perpendicular to each pull.

Revise setup to apply force downward.

Number of Samples Tested: One (1)

6.2.3. Acceptance Level:

Pulls shall resist force without breakage. After completion of test and removal of weight, there shall be no significant permanent deformation.

Results:

There was no functional or structural damage to the unit. The drawer and door operated freely. The sample meets the acceptance criteria. Refer to the following photographs.











Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions (Terms-and-Conditions) Terms-and-Conditions/Terms-an



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 17 of 38

6.3 DRAWER IMPACT TEST:

Date Tested: Oct 25, 2016 Condition of Test Sample: New

Model Number	Description of Sample
BETALAB-FM-MS-001	Base Cabinet

6.3.2. Test Procedure:

Test Method: Remove drawer; support each corner with 2"×2"×1"

(50.8×50.8×25.4mm) supports. Drop a 10 pound (4.545 Kg) sand or shot bag from a height of 24" (609.6mm) into the bottom of the drawer at the center of the width of the drawer. Remove the sand or shot bag.


Number of Samples Tested: One (1)

6.3.3. Acceptance Level:

No damage or breakout of the drawer bottom.

Results:

The submitted sample meets the above acceptance criteria. Refer to the following photograph.

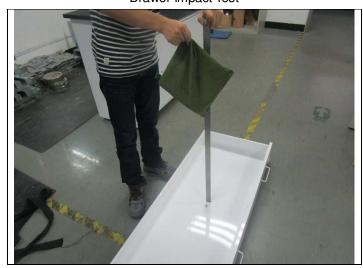

Drawer Impact Test



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Cond



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 18 of 38

6.4 DRAWER INTERNAL ROLLING IMPACT TEST:

Date Tested: Oct 25, 2016 Condition of Test Sample: New

Model Number	Description of Sample
BETALAB-FM-MS-001	Base Cabinet

6.4.2. Test Procedure:

Test Method: Position the drawer on a table at a 45-degree angle.

Place a 2" (50.8mm) diameter by 12" (304.8mm) long steel rod (approximately 10 pounds (4.545 Kg) 13" (330.2mm) from the target impact area such that the rod will roll freely to impact the back of the drawer. Subject the back to three impacts and reverse the drawer to subject the front to three additional impacts.

Number of Samples Tested: One (1)

6.4.3. Acceptance Level:

The drawer shall show no permanent damage. All joinery shall be intact and the drawer, when replaced in the unit, shall operate normally. Minor scratches and dents are acceptable.

Results:

The submitted sample meets the acceptance criteria of the test described. Refer to the following photograph.



Rolling Impact Test



Inless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Tems-and-Conditions, sapx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Tems-and-Conditions.gov and, for electronic Documents as the total control of the temperature of the service of



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 19 of 38

6.5 DRAWER CYCLE TEST:

Date Tested: DEC 13, 2016 TO DEC 19, 2016

Condition of Test Sample: New

Model Number	Description of Sample
BETALAB-FM-MS-001	Base Cabinet

6.5.2. Test Procedure:

Test Method: Laboratory Load (100 pounds (45.35 Kg) – A static

load of 100 pounds (45.35 Kg) (using ten 10-pound (4.54 Kg) sandbags per Section 3.1) shall be uniformly distributed in the drawer. Measure force required to activate the drawer. Operate from a

closed position to within $\frac{1}{4}$ " (6.35mm) of full extension for 50,000 cycles at a rate not to exceed 10 cycles

per minute.

Number of Samples Tested: One (1)

6.5.3. Acceptance Level:

The drawer shall operate freely without evidence of dragging rubbing or binding. The force required to open and close loaded drawer shall not be greater 8 pounds (3.63 Kg) to activate hardware.

Results:

The submitted sample meets the acceptance criteria of the test. Refer to the following photograph.



Cabinet Drawer Cycle Test



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed verifies, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.asp.and.or/en/com/en/lerms-and-Conditions.asp.and.or/en/com/en/lerms-and-Conditions.ferms-e-Document.asp.a.d. at <a href="http://www.sgs.com/en/lerms-and-Conditions/ferms-and-Conditions/ferms-and-Conditions/ferms-e-Document.asp.a.d. at <a href="http://www.sgs.com/en/lerms-and-Conditions/ferms-and-



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 20 of 38

7.2 SHELF LOAD TEST:

Date Tested: Oct 25, 2016 Condition of Test Sample: New

Model Number	Description of Sample
BETALAB-FM-MS-001	Base Cabinet

This test is only testing shelf deflection of the shelf in a base and wall cabinet.

Base Cabinet has a shelf that is 49cm (19.3") depth x 120.5 cm (47.4") wide.

7.2.2. Test Procedure:

Test Method:

A shelf shall be mounted in the manner in which it is designed. Measure the distance from the underside of the shelf to a reference point perpendicular to the center of the shelf. Use shot or sand bags weighing 10 pounds (4.535 Kg) each. Unless otherwise specified, load the shelf uniformly to 40 pounds (18.14 Kg) per square foot shelf area to a maximum of 200 pounds (90.70 Kg). Measure the deflection on the shelf by measuring the distance to the reference point and calculating the difference between the two measurements. Record data and remove load from the shelf.

7.2.3. Acceptance Level:

The allowable maximum deflection of a shelf is 1/180 of the span and not in excess of .25" (6.35mm).

Results:

Shelf Type	Shelf Load	Deflection	Description of
Shell Type	Shell Load	Measured	Results
Base Cabinet Shelf	90.7kg	5.20mm	pass

The submitted samples meet the acceptance criteria for the test described above. Refer to the following page for photographs.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/frems-and-Conditions.apx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx Attention is drawn to the limitation of lability, indemnification and jurisdiction issues defined therein. Any holder of this document I advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits or Client's Instructions, if any. The Company's sole responsibility is to its Client and this document of each of the company and the sole of the company and the sole of the company and the co



Test Report

No.: AJHL1610011022FT

Date: DEC 30, 2016

Page: 21 of 38

Shelf Load Test





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printec overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx Attention is drawn to the limitation of lability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits or Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exceed parties to a company's contained to the company and within the limits or except in full, without prior written approval of the Company. Any unauthorized alteration, foregry or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the w. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention:To check the authenticity of testing / inspection report & certificate, please contact was telephone: (86-755) 8307.



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 22 of 38

8.1 CHEMICAL SPOT TEST:

Date Tested: Oct. 11, 2016 to Oct. 18, 2016 Condition of Test Sample: Production Samples

Description of Samples:

Part Description: Panel with white coating
Material Submitted: Painted Steel Panels
Material Specification: SEFA 8M-2016

Test Procedure:

Test Method: SEFA 8M-2016, Sec 8.1

The received sample to be tested for chemical resistance as described herein: Place panel on flat surface, clean with soap and water and blot dry. Condition the panel for 48-hours at $73\pm3\,^{\circ}\text{F}$ ($23\pm2\,^{\circ}\text{C}$) and $50\pm5\%$ relative humidity or the currently accepted guideline set by ASTM. Test the panel for chemical resistance using forty-nine different chemical

reagents by one of the following methods.

Method A: Test volatile chemicals by placing a cotton ball

saturated with reagent in the mouth of a 1-oz. (29.574cc) bottle and inverting the bottle on the

surface of the panel.

Method B: Test non-volatile chemicals by placing five drops of

the reagent on the surface of the panel and covering

with a 24 mm watch glass, convex side down.

For both of the above methods, leave the reagents on the panel for a period of one hour. Wash off the panel with water, clean with detergent and naphtha, and rinse with deionized water. Dry with a towel and evaluate after 24 hours at 73 ± 3 °F (23 ± 2 °C) and 50 ± 5 % relative humidity or the currently accepted guideline set

by ASTM using the following rating system.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Ferms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/ferms-en/Coopument.aspx subject to Ferms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/ferms-en/Coopument.aspx advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document ose not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery classification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for aday only.



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 23 of 38

Rating Scale: Level 0 No detectable change.

Level 1 Slight change in color or gloss.

Level 2 Slight surface etching or severe staining. Level 3 Pitting, cratering, swelling, or erosion of

coating. Obvious and significant deterioration.

Number of Samples Tested: One (1)

Deviation:

Acceptance Criteria:

Results will vary from manufacturer to manufacturer due to diff erences in finish formulations. Laboratory grade finishes shall result in no more than four (4) Level 3 conditions. Individual test results, for the specifi ed 49 reagents, will be verified with the established third party, independent SEFA 8 test submittal form. Suitability for a given application is dependent upon the chemicals used in a given laboratory.

Results:

Test No.	Chemical	Method	Rating	Comments
1	Acetate, Amyl	Α	0	/
2	Acetate, Ethyl	Α	0	/
4	Acetone	Α	0	/
6	Alcohol, Butyl	Α	0	/
7	Alcohol, Ethyl	Α	0	/
8	Alcohol, Methyl	Α	0	/
10	Benzene	Α	0	/
11	Carbon Tetrachloride	Α	0	/
12	Chloroform	Α	1	/
14	Cresol	Α	0	/
15	Dichloroacetic Acid	Α	3	/
16	Dimethylformanide	Α	1	/
17	Dioxane	Α	1	/
18	Ethyl Ether	Α	1	/
19	Formaldehyde, 37%	Α	0	/
21	Furfural	Α	3	/
22	Gasoline	Α	0	/



Inless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed verleraf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Conditions/Terms-en-Conditions/Terms-en-Conditions/Terms-en-Conditions/Terms-en-Conditions/Terms-en-Conditions/Terms-en-Conditions/Terms-en-Conditions/Terms-en-Document.aspx. It is described that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of identifications, if any: The Company's sole responsibility is to its Client and this document does not exonerate parties to a sole responsibility is to its Client and this document does not exonerate parties to a succept in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or perpearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law lines otherwise stated the esuits shown in this test report refer only to the sample(s) tested and sucn sample(s) are retained for 30 days only.

**Whetention:To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307.



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016

Test No.	Chemical	Method	Rating	Comments
27	Methyl Ethyl Ketone	Α	0	/
28	Methylene Chloride	Α	0	/
29	Mono Chlorobenzene	Α	0	/
30	Naphthalene	Α	0	/
34	Phenol, 90%	Α	0	/
46	Toluene	Α	0	/
47	Trichloroethylene	Α	0	/
48	Xylene	Α	0	/

Test No.	Chemical	Method	Rating	Comments
3	Acetic Acid, 98%	В	0	/
5	Acid Dichromate, 5%	В	0	/
9	Ammonium Hydroxide, 28%	В	0	/
13	Chromic Acid, 60%	В	2	/
20	Formic Acid, 90%	В	1	
23	Hydrochloric Acid, 37%	В	0	/
24	Hydrofluoric Acid, 48%	В	0	/
25	Hydrogen Peroxide, 30%	В	0	/
26	lodine, Tincture of	В	0	/
31	Nitric Acid, 20%	В	0	
32	Nitric Acid, 30%	В	0	/
33	Nitric Acid, 70%	В	2	/
35	Phosphoric Acid, 85%	В	0	/
36	Silver Nitrate, Saturated	В	0	/
37	Sodium Hydroxide, 10%	В	0	/
38	Sodium Hydroxide, 20%	В	0	/
39	Sodium Hydroxide, 40%	В	0	/



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed verleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at <a href="http://www.sgs.com/en/Terms-and-Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions ferms-e-Document.aspx.com/en/Terms-and-Conditions ferms-e-Document.aspx.advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of clients instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a ransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or afficiation of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the setules shown in this test report refer only to the sample(s) are retained for 30 decreased only.

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgsgroup.com.cn 中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编:313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com

Page: 24 of 38



Test Report

No.: AJHL1610011022FT

Date:	DEC	30.	2016

16 Page: 25 of 38


Test No.	Chemical	Method	Rating	Comments
40	Sodium Hydroxide,			/
	Flake	В	0	
41	Sodium Sulfide,			Y
	Saturated	В	0	
42	Sulfuric Acid, 33%	В	0	/
43	Sulfuric Acid 77%	В	0	/
44	Sulfuric Acid, 96%	В	3	/
45	Sulfuric Acid, (77%) and Nitric Acid (70%), equal parts	В	3	/
49	Zinc Chloride, Saturated	В	0	/

Totals				
Items	Requirement	No. Reagent with 3 Ratings	Disposition	
Volatile Subtotal:	-	2		
Non-volatile Subtotal:	-	2		
Grand Totals:	No More than Four Level 3 Conditions	4	Conforming	

Chemical Spot Test "As Received" Test Panel



Chemical Spot Test Panel after Exposure

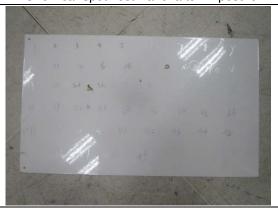



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://tww.sgs.com/en/Terms-and-Conditions/Terms-and-Cond



Test Report No.: AJHI

No.: AJHL1610011022FT

Date: DEC 30, 2016 Page: 26 of 38

The following photos are of the Level 3 Results

Chemical Spot Test 15 Dichloroacetic Acid



Chemical Spot Test 44 Sulfuric Acid, 96%



Chemical Spot Test 45 Sulfuric Acid, (77%) and Nitric Acid (70%), equal parts







Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Ferms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions-Emes-Document.aspx subject to Ferms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions-Emes-Document.aspx advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exponerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery classification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the University of the Company and the content of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and souch sample(s) are retained for Jodys only.



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 27 of 38

8.2 HOT WATER TEST:

Date Received: Oct 11, 2016 Dates Tested: Oct 20, 2016

Description of Samples:

Part Description: Panel with white coating
Material Submitted: Painted Metal Panel
Material Specification: SEFA 8M-2016
Condition of Test Sample: Production

Test Procedure:

Test Method: SEFA-8M-2016, Sec 8.2

Procedure: Hot water (190 °F to 205 °F(88 °C to 96 °C)) shall

be allowed to trickle (with a steady stream and at a rate of not less than 6 ounces [177.44cc] per minute) on the finished surface, which shall be set at an angle of 45°, for a period of five minutes.

Number of Specimens Tested: One (1)

Acceptance Criteria:


After cooling and wiping dry, the finish shall show no visible effect from the hot water.

Results:

Specimen Visible Effects From Hot Water		Disposition
1	None	Conforming

Hot Water Test "As Received" Test Panel



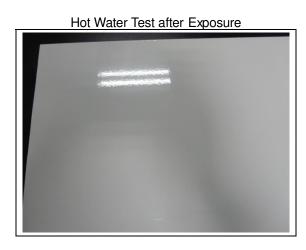



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspy.act of electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspy.act Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any horder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document is not exceed a parties to a exceed in full, without prior written approval of the Company. Any unauthorized alteration, foreign or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 28 of 38



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on requests or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents overleaf, available on requests or accessible at the company and conditions of Conditions of Conditions and Conditions of Conditions on Conditions of Conditions

1443, or email: CM_Doccheck@egg.com No.301,Sunight Rod.2 Block, Sulfrid Industry Zone. Ariji County, Zhejiang Province, China 313300 中国 · 浙江 · 安吉县阳光工业园二区阳光大道301号 邮编:313300 t (86-572) 5018825 f (86-572) 5018825 e (86-572



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 29 of 38

8.3 IMPACT TEST:

Date Received: Oct 11, 2016 Dates Tested: Oct 20, 2016

Description of Samples:

Part Description: Panel with white coating
Material Submitted: Painted Metal Panel
Material Specification: SEFA 8M-2016
Condition of Test Sample: Production

Test Procedure:

Test Method: SEFA 8M-2016, Sec 8.3

Procedure: Position the panel on a smooth concrete floor. A one-

pound ball (approximately 2" [50.8mm] in diameter) shall be dropped from a distance of 12" (304.8 mm)

onto a flat horizontal surface.

Number of Specimens Tested: One (1)

Acceptance Criteria:

There shall be no visual evidence to the naked eye of cracks or checks in the finish due to impact.

Results:

Specimen	Cracks or Checks in Finish	Disposition
1	None	Conforming

Finish Impact Test before Impact Finish Impact Test after Impact





Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 30 of 38







Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents of the control of the control



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 31 of 38

8.4 PAINT ADHESION TEST:

Date Received: Oct 11, 2016 Dates Tested: Oct 20, 2016

Description of Samples:

Part Description: Panel with white coating
Material Submitted: Painted Metal Panel
Material Specification: SEFA 8M-2016
Condition of Test Sample: Production

Test Procedure:

Test Method: SEFA 8M-2016, Sec 8.4: ASTM D3359-02, Method

B, Cross-Cut Tape Test

Procedure: Two sets of six parallel lines 2 mm apart shall be cut

with a razor blade to intersect at right angles thus forming a grid of 25 squares. The cuts shall be made just deep enough to go through the coating, but not into the substrate. Brush the grid area lightly with a soft brush then place a piece of tape over the grid. Rub the tape firmly with the eraser of a pencil to ensure good contact. Remove the tape by rapidly pulling it back upon itself as close to an angle of 180°

as possible.

Tape: Permacel P99

Number of Specimens Tested: One (1) Panel

Acceptance Criteria:

A 4B rating or better (ninety five percent or more of the grid area shall show finish intact.)

Results:

Specimen	Tape Rating	% of Intact Squares	Disposition
1	5B	100%	Conforming



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sus.com/en/Terms-and-Conditions.aspx and, for electronic Formations at http://www.sus.com/en/Terms-and-Conditions/Terms-Document.aspx subject to Ferms and Conditions for Electronic Documents at http://www.sus.com/en/Terms-and-Conditions/Terms-Document.aspx subject to Ferms and Conditions/Terms-Document.aspx subject to Ferms and Conditions for Electronic Documents at http://www.sus.com/en/Terms-and-Conditions/Terms-Document.aspx subject to Ferms and Conditions for Electronic Terms-Documents and the Conditions for Electronic Terms-Documents and the Conditions of the Conditions and the Conditions of the Conditions




Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 32 of 38

Before Paint Adhesion Test



After Paint Adhesion Test

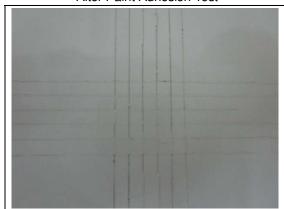



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Con



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 33 of 38

8.5 PAINT HARDNESS TEST:

Date Received: Oct 11, 2016 Dates Tested: Oct 20, 2016

Description of Samples:


Part Description: Panel with white coating
Material Submitted: Painted Metal Panel
Material Specification: SEFA 8M-2016
Condition of Test Sample: Production

Test Procedure:

Test Method: Procedure:

SEFA 8M-2016, Sec 8.5; ASTM D3363-05

Clip a comer of the sample at 45° exposing a raw metal edge. Place the sample on a raw metal base plate so that the exposed metal edge of the sample makes contact with the turned up side of the base plate (see figure below) Fig 12. Paint Hardness on Steel Test Configuration





Remove approximately 6 mm of wood from a 4H pencil, being careful to leave an undisturbed smooth cylinder of lead. Holding the pencil at an angle of 90° to an abrasive paper, rub the lead against the paper marinating an exact angle of 90° until a flat smooth and circular cross section is obtained. On the other end the pencil remove approximately 13 mm of wood



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions frems-e-Document.asxx Attention is drawn to the limitation of lability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document is contained to the company and its company and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and his document does not exceed parties to a contained to the company. Any unauthorized alteration, foreign of falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the .Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 830:



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 34 of 38

from one half of the pencil (see figure above).

Sheen model 720N Pencil Scratch Hardness Tester. Connect a continuity meter to the base plate and to the top of the pencil, being sure to make good contact with the exposed portion of the lead.

Following the manufactures instructions place the tester on the surface of the test sample and push it forward approximately 13 mm. Rotate the pencil 90° in the holder and repeat the test to one side of the first test. Repeat this two more times for a total of four tests, each with a different quadrant of the pencil lead.

Pencils used: Mitsubishi®

Number of Specimens Tested: One (1) Panel


Acceptance Criteria:

The paint finish shall withstand the abrasion of a 4H pencil without penetrating through to the substrate and completing a continuous circuit.

Results:

Specimen	Pencil Hardness	Pencil Penetrating to Substrate	Completing a Continuous Circuit	Disposition
1	4H	None	None	Conforming

Paint Hardness Test Set-up

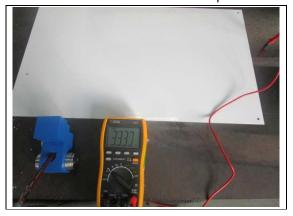

Paint Hardness Test after Exposure





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on requestor or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein, hy holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and his document iso and exorerate parties to a except in full, without prior written approval of the Company, Any unauthorized alteration, foregry or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Test Report No.: AJHL1610011022FT

Date: DEC 30, 2016 Page: 35 of 38

End of report



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents of the control of the control



Test Report

No.: AJHL1610011022FT Date: DEC 30, 2016

Page: 36 of 38

CERTIFICATE OF SEFA COMPLIANCE

SGS -CSTC Co., Ltd. Anji Branch certifies that it has performed testing as specified in **SEFA 8M-2016 Laboratory grade metal casework** on the laboratory grade furniture produced by Guangdong Beta Laboratory Furniture Company Ltd on Dec 30, 2016 obtaining the results below. Full documentation of the test results is available upon request in a bound report that includes a detailed description of the test unit and procedures, witnesses results and appropriate drawings or photographs of the test unit and procedures.

SEFA 8M-2016 Laboratory grade metal casework

Nos. of Specimen: 1pc.

Test Result : Pass. Details shown as following table

Clause	Test Items	Result	Note
4.0	Base cabinets		
4.1	Description of test cabinet		
4.2	Cabinet load test	Pass	
4.3	Cabinet concentrated load test	Pass	
4.4	Cabinet torsion	Pass	
5.0	Doors		
5.1	Door hinge test	Pass	
5.2	Door impact test	Pass	
5.3	Door cycle test	Pass	
6.0	Drawers		
6.1	Drawer static test	Pass	
6.2	Drawer and door pull test	Pass	
6.3	Drawer impact test	Pass	
6.4	Drawer internal rolling impact test	Pass	
6.5	Drawer cycle test	Pass	
7.0	Shelving		
7.1	Description of test unit		
7.2	Shelf load test	Pass	
8.0	Cabinet surface finish test		
8.1	Chemical spot test	Pass	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic foreat document subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Noider of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits clients and successions, if any. The Company's sole responsibility is to its Client and this document does not exomerate parties to clients instructions, if any. The Company's sole responsibility is to its Client and this document does not exomerate parties to except in full, without prior written approval of the Company. Any unauthorized alteration, forger or faisification of the content appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:To check the authenticity of testing / inspection report & certificate, please contact vas at telephone: (8e-755) 830



Test Report No.: AJHL1610011022FT Date: DEC 30, 2016 Page: 37 of 38

8.2	Hot water test	Pass	
8.3	Impact test	Pass	
8.4	Paint adhesion test	Pass	
8.5	Paint hardness test	Pass	
9.0	Wall, counter mounted, and tall units		
9.1	Description of test cabinet		# 1
9.2	Wall cabinet load test	N/A	# 1
10	Tables		
10.1	Description of test unit	N/A	# 1
10.2	Table static load	N/A	# 1
10.3	Table racking	N/A	# 1
Notes	: # 1- N/A means not applicable to this product design.		





Test Report

No.: AJHL1610011022FT Date: DEC 30, 2016

Page: 38 of 38

Member Information	
Contact Name:	Angie Lu
Member Name:	Guangdong Beta Laboratory Furniture Company Ltd
Address 1:	East, Gangbeng Station, Xijiu Village, Jinben
	Development Area, Xinan Town, Sanshui District,
	Foshan City, Guangdong Province, PRC.
Address 2:	/
City, State(Region)	Foshan
Postal Code:	528100
Country:	China
Phone:	0086 757 8778 1151/8778 1161
Email:	angie@chinalabfurniture.com

Test Lab Information	
Contact Name:	David Fan
Contact Title:	Lab supervisor
Test Lab Name	SGS HL Lab
City, State(Region)	Zhejiang, Anji
Postal Code Country:	313300
Signature:	9
	m

Test Performed by:	SGS HL Lab
Name of Tester:	Jack Xu
Signature of Tester:	JAA



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Ferms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions-Emes-Document.aspx subject to Ferms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions-Emes-Document.aspx advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exponerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery classification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the University of the Company and the content of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and souch sample(s) are retained for Jodys only.